

# Nine Patch Coaster with Bias Tape Maker



## Finished size

- Width: approx. 13 cm (5 1/8 inch) x
- Length: approx. 13 cm (5 1/8 inch)

## Tools

- Sewing tools
- Erasable marker
- Cloth cutting scissors
- Rotary Cutter (Art No. 7500)
- Template 4 cm (1 1/2 inch) x 4 cm...square
- Pins
- Bias Tape Maker 18 mm (Art No. 464/18) or Fusible Bias Tape Maker (Art No. 4014)
- Sewing Needle/Quilting Needle
- Clothes Iron


## Materials

- Cloth for quilt top: 15 cm (6 inch) x 15 cm x 2
- Cloth for backing: 13.5 cm (5 1/2 inch) x 13.5 cm x 1
- Batting: 13.5 cm (5 1/2 inch) x 13.5 cm x 1
- Bias tape: 3.5 cm (1 3/8 inch) x 60 cm (23 5/8 inch)
- Sewing Thread/Quilting Thread


1. Prepare cloth with the template.  
Draw the line of the template on the wrong side of cloth.  
Add 7 mm (1/4 inch) seam allowances outside of the marked square.  
This line will be the cutting line.  
Cut the squares and prepare 9 squares.

2. Place 2 squares (A and B) right side together.  
Make sure that match the corners.  
Place the pins exactly.

Take a backstitch at the beginning of your seam marking and sew with a running stitch on the line.  
Backstitch at the end of the seam marking.



3. Place 1 sewed rectangle and a square (AB and A) right side together.  
Sew them with backstitch and running stitch.

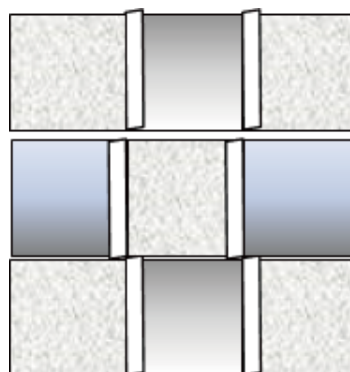

Make 3 lines (ABA, BAB, ABA).

4. Ironing the seam allowance in one direction.

5. Place first line (ABA) and second line (BAB) right side together.  
Sew them with backstitch and running stitch.  
Make sure seam allowances are locked each other.



# Nine Patch Coaster with Bias Tape Maker

6. Place third line (ABA) and second line (BAB) right side together.  
Sew them with backstitch and running stitch.  
Make sure seam allowances are locked each other.  
Do ironing.

7. Lay the batting over the backing cloth of wrong side and lay  
the quilt top over the batting right side up.  
Baste with needle and thread.



8. Draw quilting lines.  
Quilt with quilting needle and thread as you like.



9. Fold your bias tape with Bias Tape Maker or Fusible Bias Tape Maker and iron.



10. Cut the excess of batting and backing cloth.

11. Bind your quilt with the bias tapes.



12. Cut the basting thread and wash the quilt.  
Dry it.